

Product Code


010402

Specification Issued By:

.....  
Technical Advisor

Date of Issue  
.....

## 7mm Ignition Cable 19 x 0.25 Tinned Copper Conductor

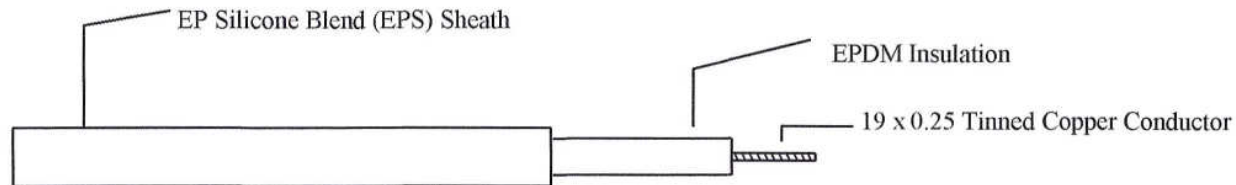

**Description**

Ignition cable with tinned copper conductor

**Conductor specification**

19 strands of 0.25mm Tinned Copper Wire (1.0mm CSA) to BS 6360 and DIN 40500.

**Insulation Specification**

Off white Ethylene Propylene Rubber (EPDM) to give a  $\text{Ø}$  of  $5.0 \pm 0.3$

**Reinforcement Specification**

N/A

**Sheath Specification**

Silicone Blend Ethylene Propylene Rubber to give a final  $\text{Ø}$  of  $7.0\text{mm} \pm 0.3$

**Cable Specification**

ISO 3808 Parts 1 & 2 Class C Type 1. Min Breakdown 35kV, Temperature Range -30 to 155 Degrees C

\* Except Resistance to Flame Propagation and Resistance to Oil Tests on EPDM and EPS Jacketed Constructions