


# Multitimer adjustable device

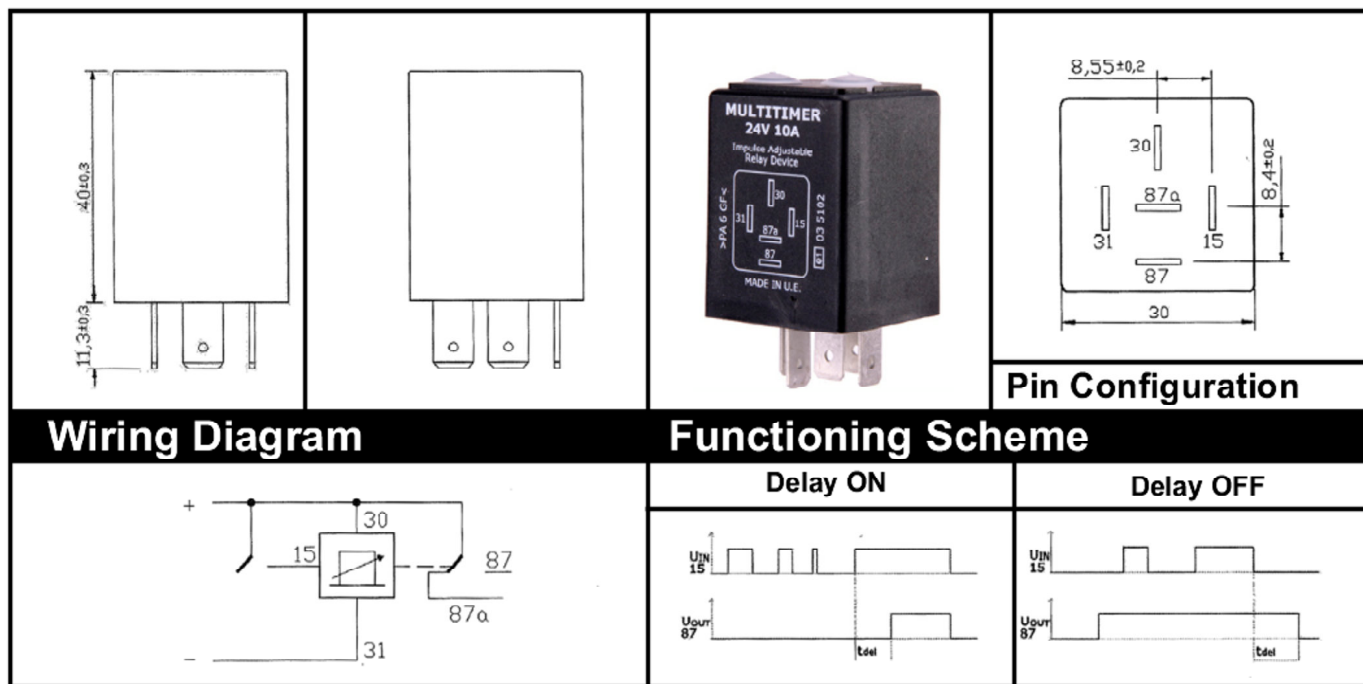

This is an electronic device that operates after a single impulse in the same way as timer relay but the delay is not pre determined.  
Choose between 10 time frames and chose the exact delay by the other trimmer.

Our Code	Rated Voltage	Amperage	TIME DELAY	OPTIONS TABLE			
				Delay OFF		Delay ON	
140271	12V	10A	Between 0,5 sec. to 6 hour	0	0,5 ... 10S	5	0,5 ... 6H
				1	5 ... 60S	6	5 ... 60M
				2	0,5 ... 10M	7	0,5 ... 10M
				3	5 ... 60M	8	5 ... 60S
				4	0,5 ... 6H	9	0,5 ... 10S
140272	24V	10A					
<b>Materials</b>							
<b>Baseplate</b>		Nylon PA 6,6 + 30% Glass fibre Black		<b>Terminals</b>		Cu Zn (6,3X0,8 mm)	
<b>Cap</b>		Nylon PA 6,6 + 15% Glass fibre Black					
<b>Additional Data</b>							
<b>In conformity with:</b>		ISO 7588 - DIN 46244 - ISO 8092		EU Dir. 2002/95/EC RoHS		DIN 4000: IP 5K4 Terminals pointing downwards	
				DIR. 95/54 CE REG. 10 ECE-ONU/2		EMC DIN 40839	